




## Fused Terminal Blocks

### 1003 SI/ 2 DS GW

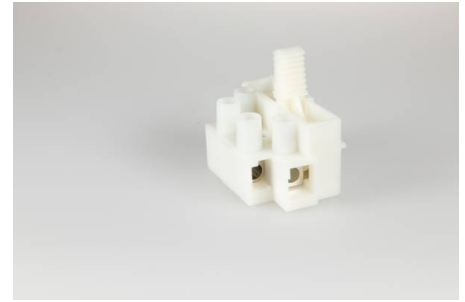

#### Order Info

reference number (ref. no.)	11624
PU	200
EAN	4028012144006

#### Type

Type	screw terminal block with fuse holder 6,3x25/6,3x32
connection type	screw
number of poles	2 pole
colour	naturalal
wire protection	yes

#### Electrical Data

rated voltage	500 V
rated current	16 A

#### Connection Data

cross-section rating	4.0 mm <sup>2</sup>
cross-section rating (UL)	22-10 AWG
clamping range	0.5 - 10.0 mm <sup>2</sup>
type of conductor	fine stranded, stranded, solid
type of conductor internal	fine stranded, stranded, solid
type of conductor external	fine stranded, stranded, solid
stripping length	7.5 - 8.0 mm
clamping units per pole	1
contact screw assembly	0.8 x 4.0 / $\cup$ 0.8 Nm
socket diameter	3.70 mm

#### Ambient Conditions

T <sub>max</sub> ambient air (at rated current)	85 °C
T <sub>min</sub> ambient air (operation)	-40 °C

#### Materials

insulator material	PA GW
contact material	brass
flammability rating acc. to UL 94	V-2

## Approvals

<b>acc. to EN 60127</b>	yes
<b>acc. to UL</b>	yes
<b>acc. to CSA</b>	yes

## Accessories

<b>ZEL 110</b>	196420
----------------	--------