




## Building Installation Connector System AC 166®

G

Plug and Socket Connectors Tall Version

### AC 166 GBU/ 3 PB

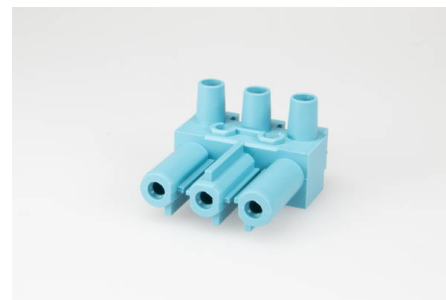

#### Order Info

reference number (ref. no.)	165043
PU	200
EAN	4028012112708

#### Type

Type	socket
connection type	screw
number of poles	3 pole
coding	5 (DALI)
colour	pastel blue
protection against incorrect plugging	yes

#### Electrical Data

rated voltage	250 V
rated current	20 A
rated impulse voltage	4.0 kV

#### Connection Data

cross-section rating	2.5 mm <sup>2</sup>
cross-section rating (UL)	14 AWG
clamping range	0.5 - 4.0 mm <sup>2</sup>
type of conductor	fine stranded, stranded, solid
stripping length	7.0 mm
fixing	Screw
clamping units per pole	1
contact screw assembly	0.8 x 4.0 / ⌀ 0.5 Nm
mounting hole diameter	3.1 mm

#### Ambient Conditions

T <sub>max</sub> ambient air (at rated current)	70 °C
T <sub>max</sub> component (operation)	110 °C
T <sub>min</sub> component (operation)	-20 °C
IP Code acc. to EN 60529	IP20

IP Code when plugged	IP40
----------------------	------

## Materials

insulator material	PA
contact material	brass
flammability rating acc. to UL 94	V-2

## Approvals

acc. to EN 61535	yes
acc. to UL	yes
acc. to CSA	yes

## Accessories

AC 166-1/ 3 ZEL F SW	166163
AC 166-1/ 3 ZEL F WS	166153
AC 166-1/ 3 ZEL FEO SW	12822
AC 166-1/ 3 ZEL FO SW	12833
AC 166-1/ 3 ZEL FO WS	12837
AC 166-1/ 3 ZEL R SW	166063
AC 166-1/ 3 ZEL R WS	166053
AC 166-1/ 3 ZEL RO SW	12873
AC 166-1/ 3 ZEL RO WS	12883
AC 166-1/ 6 ZEL R SW	166066
AC 166-1/ 6 ZEL R WS	166056
AC 166-1/ 6 ZEL RO SW	13019
AC 166-1/ 6 ZEL RO WS	13020